

Characteristics and Applications:

TL-128G is an iron powder low hydrogen type, 830N/mm² grade high tensile steel electrode. The product provides excellent crack resistance, good mechanical properties and smooth bead appearance. It features good arc and easy slag removal. It is suitable for heat treatable low alloy steel (such as SCM21/4 chrome-molybdenum steel SNCM8 Ni-Cr-Mo steel). Proper base metals are also including forging cast iron ASTM A486 Gr. 120/A508 Gr. 5a.4a pressure vessel steel plate A543 Gr. B3.C3, etc.

Notes on usage:

1. Dry the electrodes at 350-400 for 60 minutes and keep at 100-150 before using.
2. Take the backstep method to prevent blowholes at the arc starting.
3. Keep the arc as short as possible.
4. Preheat the plates at 150~200 before welding.

Typical chemical composition of weld metal (wt%):


C	Mn	Si	P	S	Ni	Mo	Cr	V
0.07	1.35	0.40	0.018	0.007	2.1	0.4	0.74	0.014

Typical mechanical properties of weld metal:

Yield strength MPa(ksi)	Tensile strength MPa(ksi)	Elongation %	

guarantee or warranty, and TienTai Electrode Co., Ltd. expressly disclaims any liability
controlled by TienTai Electrode Co., Ltd.

* The information contained or otherwise referenced herein is presented only as "typical" without
No data is to be construed as recommendation for any welding condition or technique not

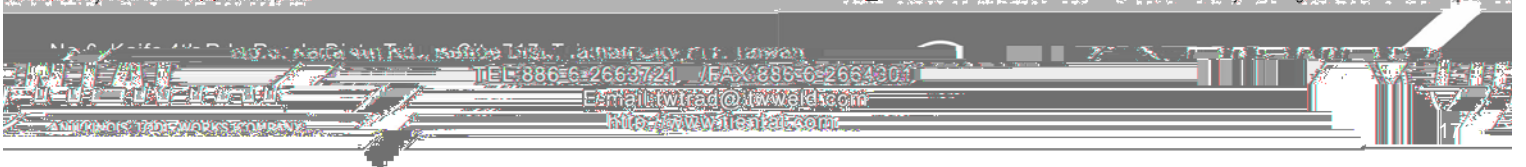

D ELECTRODI

COVERE

Tel: 886-6-2663724 / FAX: 886-6-2664301
E-mail: ttweld@tieweld.com
http://www.tientai.com